






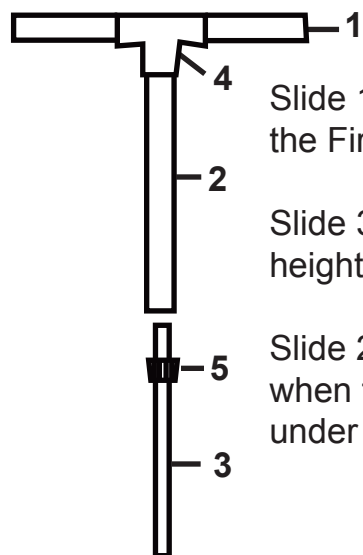
EASY TO INSTALL & REMOVE

# FIREPLACE PLUG

## Prop pieces

1.  upper tube
2.  middle tube
3.  lower tube
4.  tee
5.  sliding lock


## Assembling the Prop



Slide 1 into 4 through the outer elastic loops on the Fireplace Plug

Slide 3 into 2 using 5 (sliding lock) to adjust height.

Slide 2 and 3 into 4 (tee) and lock in place when the fireplace Plug is at the correct height under the damper.

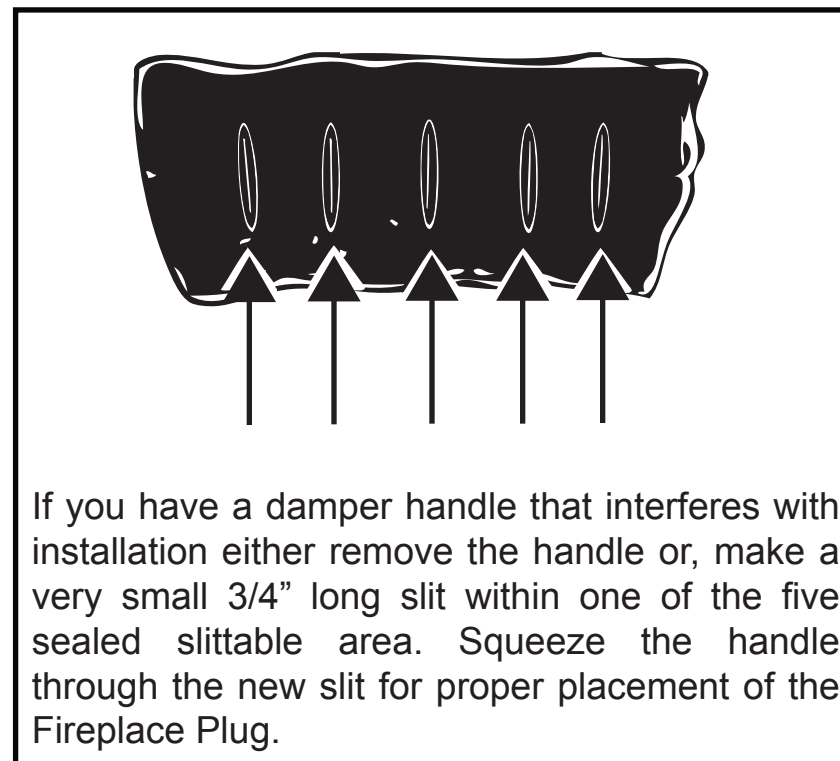

Check the firebox for sharp metal, screws etc. that could puncture the fireplace Plug. Remove or blunt the sharp obstruction. If the area where the plug will be placed is excessively dirty, clean it with a brush or shop vacuum.



Attach the telescoping prop device to the Fireplace Plug. Partially inflate (about 6 breaths of air). Place the Plug in the Firebox in a V shape, fitting the back first, then flip the front upward. The inflation tube will be on the front side of the fireplace. Adjust the height of the prop device until the Fireplace Plug fits tight against the damper.



Check the perimeter of the Plug for a uniform seal & make necessary adjustments. Blow air through the blue inflation valve until the Plug makes a drum like sound when patted with your hand. Twist the valve clockwise to close. To remove the Fireplace Plug release air through the valve by twisting it counter